FloorStak®


Technical Details


Balustrade

Height to handrail 1.1m Up to 1.5 Kn/M2 Resistance rating - at Top handrail Resistance rating - at infill Subject to test Construction Welded Aluminium Profiles Finish Powder Coated Width adjustment - 2.5m Nom (5 metre bays) Min 2390mm - Max 2506mm Width adjustment - 3m Nom (3 metre bays) Min 2818mm - Max 2934mm Assembly and Adjustment M10 spanner (supplied)

Benefits

- Universal fits both 3m structures and 5m structures and connects to structure frames or free standing posts
- · Adjustable Unique sliding connector allows for small variations in post and frame sizes
- Can be supplied with glass (10mm toughened), solid panel, decorative, or vertical bar infill
- Quick and easy to install with a single spanner

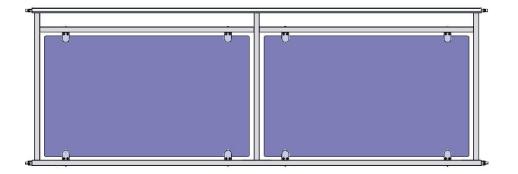

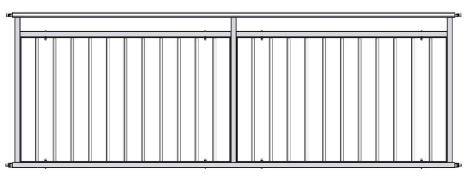

www.floorstak.com

info@floorstak.com