


## Technical Details

### Regent Cassette Flooring System

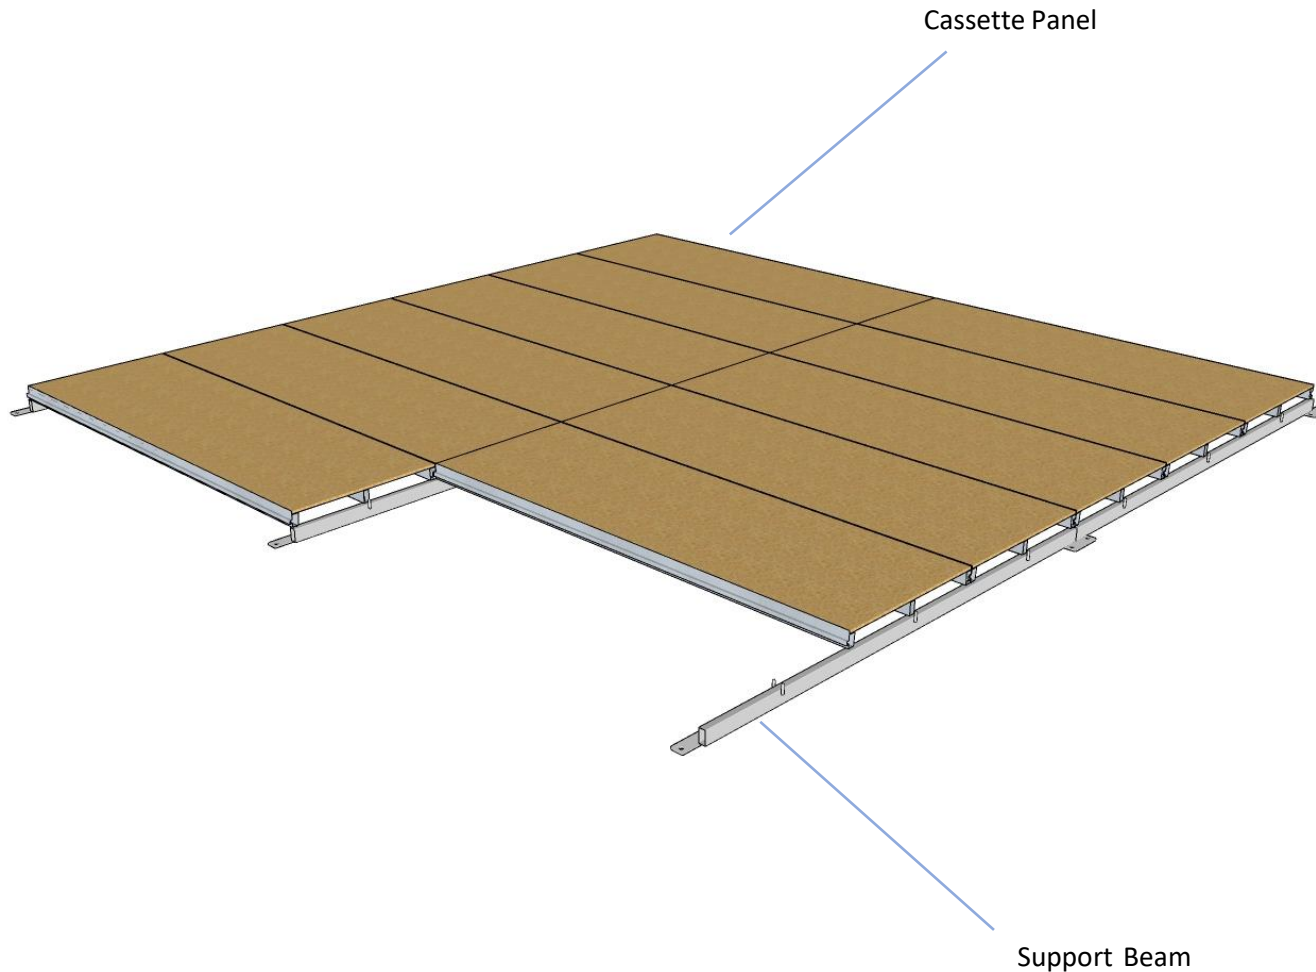

#### Specifications

##### Materials, Construction, Finish

Cassette Panels :  
18mm Baltic Birch Plywood Grade B/BB,  
optionally phenolic coated for weatherproofing  
and anti-slip  
Aluminium Grade 6082-T6  
Low Carbon Steel Grade S235/S275

Support beams :  
Low Carbon Steel Grade S235/S275  
Welding to EN 1090  
Hot Dip Galvanised to BS EN ISO 1461

#### Applications and Load Ratings

Suitable for use with temporary structures such  
as Tents, Marquees, Walkways, Platforms,  
Ramps, Landings etc.

Panel sizes and Beam lengths optimized to suit  
structure parameters.

Static Loadings range from 350 Kgs/m<sup>2</sup> to 500  
Kgs/m<sup>2</sup> depending on configuration and  
support arrangement.

[www.floorstak.com](http://www.floorstak.com)    [info@floorstak.com](mailto:info@floorstak.com)

FloorStak is a registered brand name of The  
Regent Engineering Co (Walsall) Ltd | Salisbury St  
| Darlaston | WS10 8XB | UK