



Benefits

- Superbly versatile – simply add modules as required by floor height
- Quick and easy to assemble with one spanner or impact driver
- Uses standard iStak supports for ultimate adjustability even on the most undulating sites
- Identical modular step units - no design input required, no skilled tradesperson required
- Universal “landing” element means units can be assembled in straight, 90 Degree turn, or 180 Degree turn configurations
- Satisfies regulatory requirements

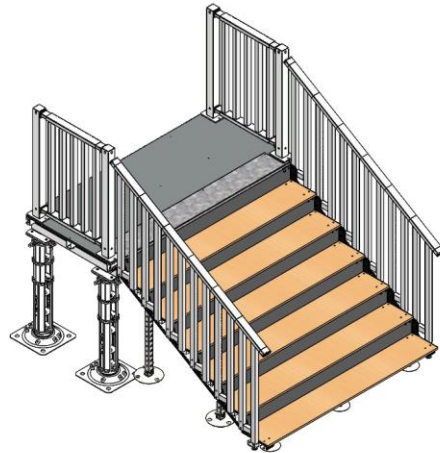

Maximum Load per step	190 Kgs (safety margin 1.5X)
Standard Step width	120cm (other sizes made to order)
Standard Height per step (Rise)	17cm
Standard Depth per step (Go)	30cm

Construction - Steps	Steel Brackets and support spines, with Phenolic coated anti-slip treads, Aluminium nosings.
Construction - Handrails	Powder coated aluminium profiles with steel connector brackets.

Assembly	Bolts together with M10 Hex Head bolts (supplied) One spanner required (supplied). 2 x standard iStak units required under each alternate step.
----------	---